

Description

Extruded Aluminum Cover designed to protect and conceal expansion joints in civil engineering structures.

Applications

Alu-Cover is used as a decorative cover to protect expansion joints, concealing any irregularities in these joints.

Advantages

- Protect sealants from physical damages.
- Able to withstand joint movement.
- Easy to apply.
- Suitable for internal and external application.

Design Criteria


Alu-Cover is designed for use with or without clips for joints width between 10 – 50mm. Alu-Cover is available in three different profiles for use in floors, walls and corners.

| Profile | Weight | Width | Joint size | Uses |
|-----------------|-------------|--------|------------|----------------|
| Alu-Cover 70 | 1.04 Kg/ LM | 69.2mm | 10 – 50 | Floors & Walls |
| Alu-Cover 60 | 0.79 Kg/LM | 57.0mm | 10 – 40 | Walls |
| Alu-Cover Angle | 0.53 Kg/LM | 52.0mm | 10 – 40 | Corners |


Packaging

Available in 3 meter long strips


WALL - CORNER JOINT DETAIL

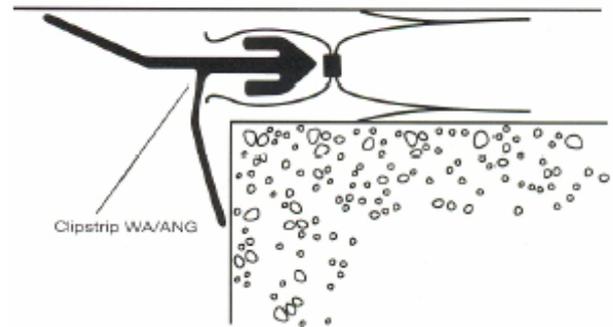

FLOOR - JOINT DETAIL

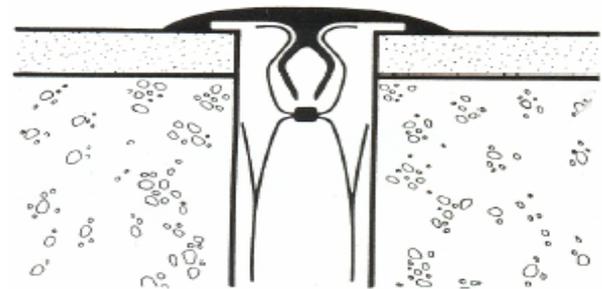

FLOOR - WATERTIGHT JOINT DETAIL

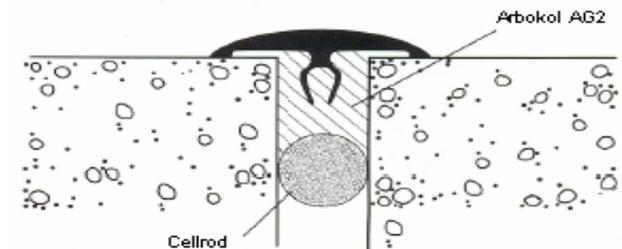

Storage

Store in good condition to eliminate damages.

Cautions

Health and safety

There is no health hazards associated with Alu-Cover in normal use.

Alu-Cover

Distributed by:
Ayla Construction Chemicals

E-mail: info@aylaint.com
Website: www.aylaint.com

Note
We endeavour to ensure that any advice, recommendation or information we may give in product literature is accurate and correct. We cannot, because we have no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation or information given by us